

**Type: 4 - Key Remote Control**  
**Model: CYTX3032**

#### Remote Control Technical Parameters

Working Voltage	12V	Shock Resistance	According to customers' requirements
Working Current	$\leq 6\text{mA}$	Modulation	ASK
Static Current	0	Package	one packed with a little-white box 100pcs/middle-sized box 500pcs/large-sized box
Frequency	315MHz/433MHz/330MHz/ 303MHz		
Frequency Deviation	0.25MHZ	Battery Life	more than 6 months(common battery) more than 1 year(brand battery)
Working Humidity	under 85%		
Working Temperature	$-20^{\circ}\text{C} \sim 70^{\circ}\text{C}$	Keystroke Life	hundreds of thousands to millions times




**Copy Instruction: (only for copy code)**

1.



**Original remote**




**Clone remote**

2. **Code clear**



Hold down buttons A and B until the LED flashes, then release the button B and press three times ( at the same time, button A is pressed all the time)

3. **Code clone**

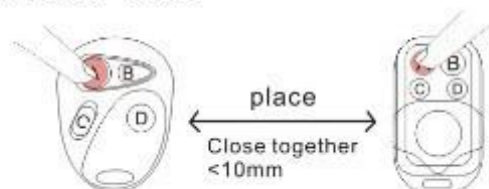

Place the original and the clone remote close together. Then press the button to be programmed on both remotes and hold until LED flashes steadily on the clone remote. . Programming is complete – Repeat steps program extra buttons.

4. **Code recovery**



Hold down button C and D until the LED flashes, now the code return to the last code you clone.

For more information and assistance, please contact us as follows:

**CY WIRELESS TECHNOLOGY LIMITED**

Add: 1407, Block C, Tairan Building, 8th Tairan Road, Futian District,

Shenzhen, Guangdong Province, China

Website: [www.rficy.com](http://www.rficy.com)

Email: [info@rficy.com](mailto:info@rficy.com)