


Type: ASK Super-Heterodyne Receiver Module
Model: CY88-V1.1-XXX

1. DESCRIPTION:

The CY88-V1.1 is a ASK/OOK compatible super heterodyne wireless receiving module with high performance for ISM frequency band. With the adoption of European brand RF wireless data transferring/receiver chipsets. The model has a high receiving sensitivity and strong ability of resisting. From wireless signal input to data output can be done without any electrical circuit. User only use extra simple data decode circuit can achieve wireless products development.

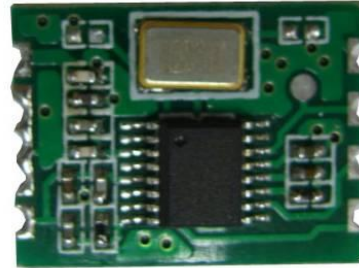

CY88-V1.1 is for industrial level version.

2. FEATURES:

- Frequency: 315MHz/433.92MHz;
- High sensitivity -110dBm@433.92 1kbps BER10E-2;
- Supply voltage: VCC= 3.6to 5.5 V;
- IF band: 230KHz;
- Low power consumption: 4.7mA@315M, 7.0mA@433.92M.
- Wide operating temperature:-20~70°C;
- Excellent selectivity and noise rejection;
- SIL(single in line) small package

3. APPLICATION:

- Remote gate controls
- Remote keyless entry
- Car alarm systems
- wireless security systems
- Automation systems

4. PIN DEFINITION:

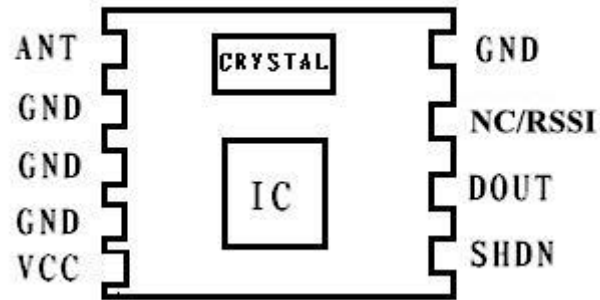


Figure1 CY88-V1.1 Shape & Pins

Pin-out as showed in figure1 above.

Pin Name	Pin Definition
GND	Connect to negative power supply
NC	Empty
DOUT	Data Pin
SHDN	Shut Down Pin
ANT	RF signal input pin, connect antenna outside(Note1)
GND	Connect to negative power supply
GND	Connect to negative power supply
GND	Connect to negative power supply
VCC	Connect to positive power supply

Note1: ANT pin is a 50 ohm antenna input. The length is about:
 23cm for 315MHz
 17cm for 433.92MHz

5. ELECTRICAL CHARACTERISTICS:

Condition: Ta=25°C Vcc=5.0V Frequency=315MHz

Parameter	Specification			Unit	Condition
	Min	Typ	Max		




CY88-V1.1

Frequency Range		315		MHz	Other freq. available
Receiver Sensitivity		-110		dBm	BER=10E-2
Data Rate	0.58	2.4	4.8	KBaud	Manchester code
Supply Voltage, VDD	3.6		5.0	V	DC
Current		4.7		mA	DC
Operating Temperature	-20		+70	°C	


Condition: Ta=25°C Vcc=5.0V Frequency=433.92MHz

Parameter	Specification			Unit	Condition
	Min	Typ	Max		
Frequency Range		433.92		MHz	Other freq available
Receiver Sensitivity		-110		dBm	BER=10E-2
Data Rate	0.58	2.4	4.8	KBaud	Manchester code
Supply Voltage, VDD	3.6		5.0	V	DC
Current		7.0		mA	DC
Operating Temperature	-20		+70	°C	

6.MECHANICAL SIZE: (UNIT: mm)

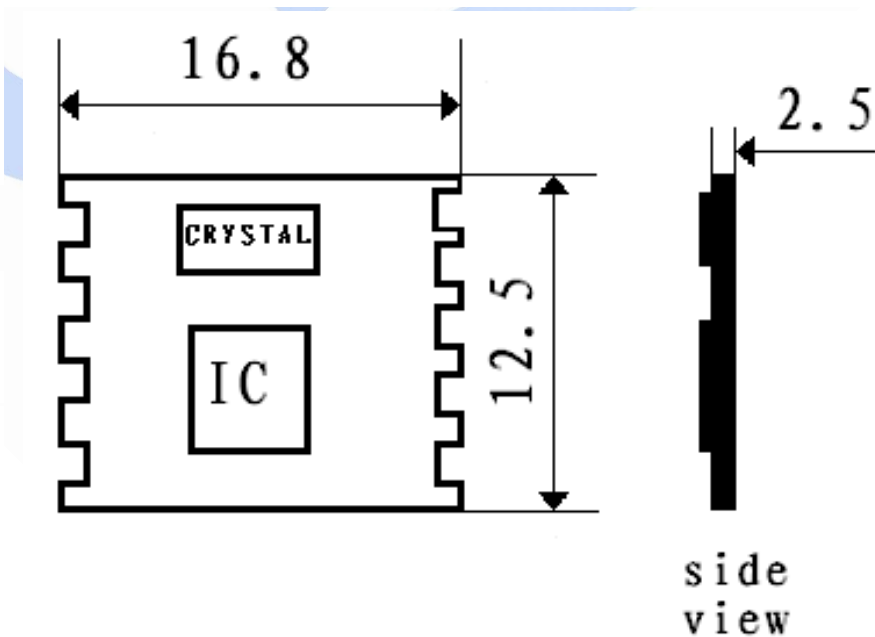

7. ORDER INFORMATION:

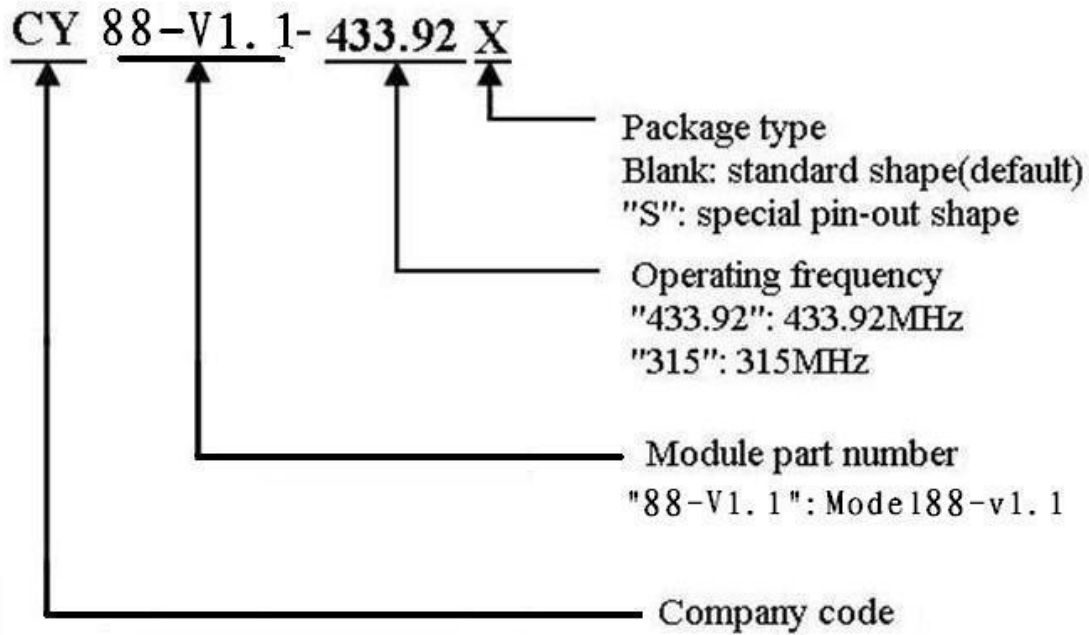

For more information and assistance, please contact us as follows:

CY WIRELESS TECHNOLOGY LIMITED

Add: 1407, Block C, Tairan Building, 8th Tairan Road, Futian District,

Shenzhen, Guangdong Province, China

Website: www.rficy.com

Email: info@rficy.com